
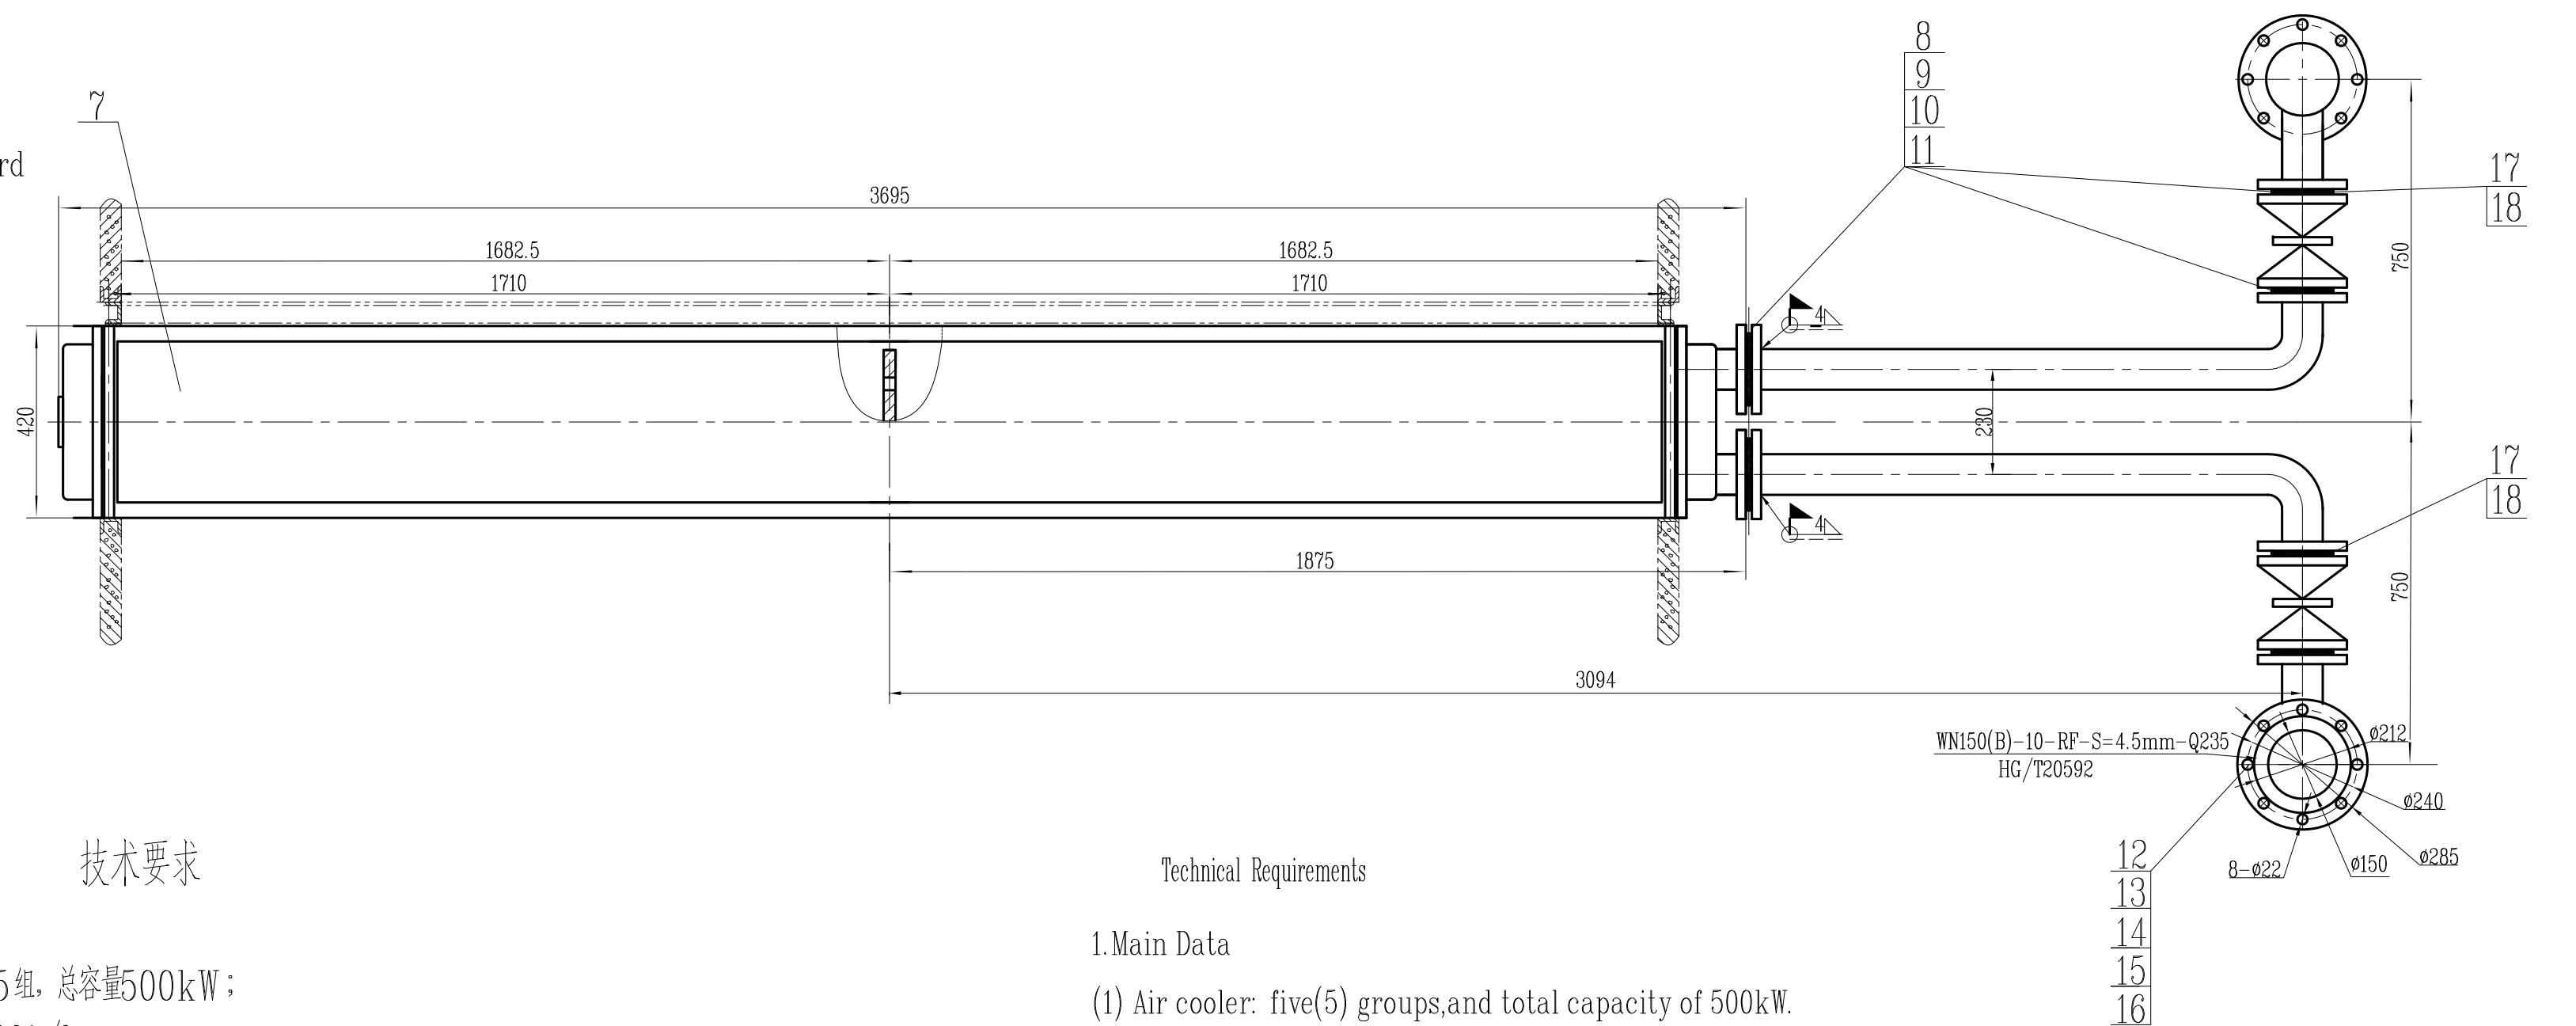
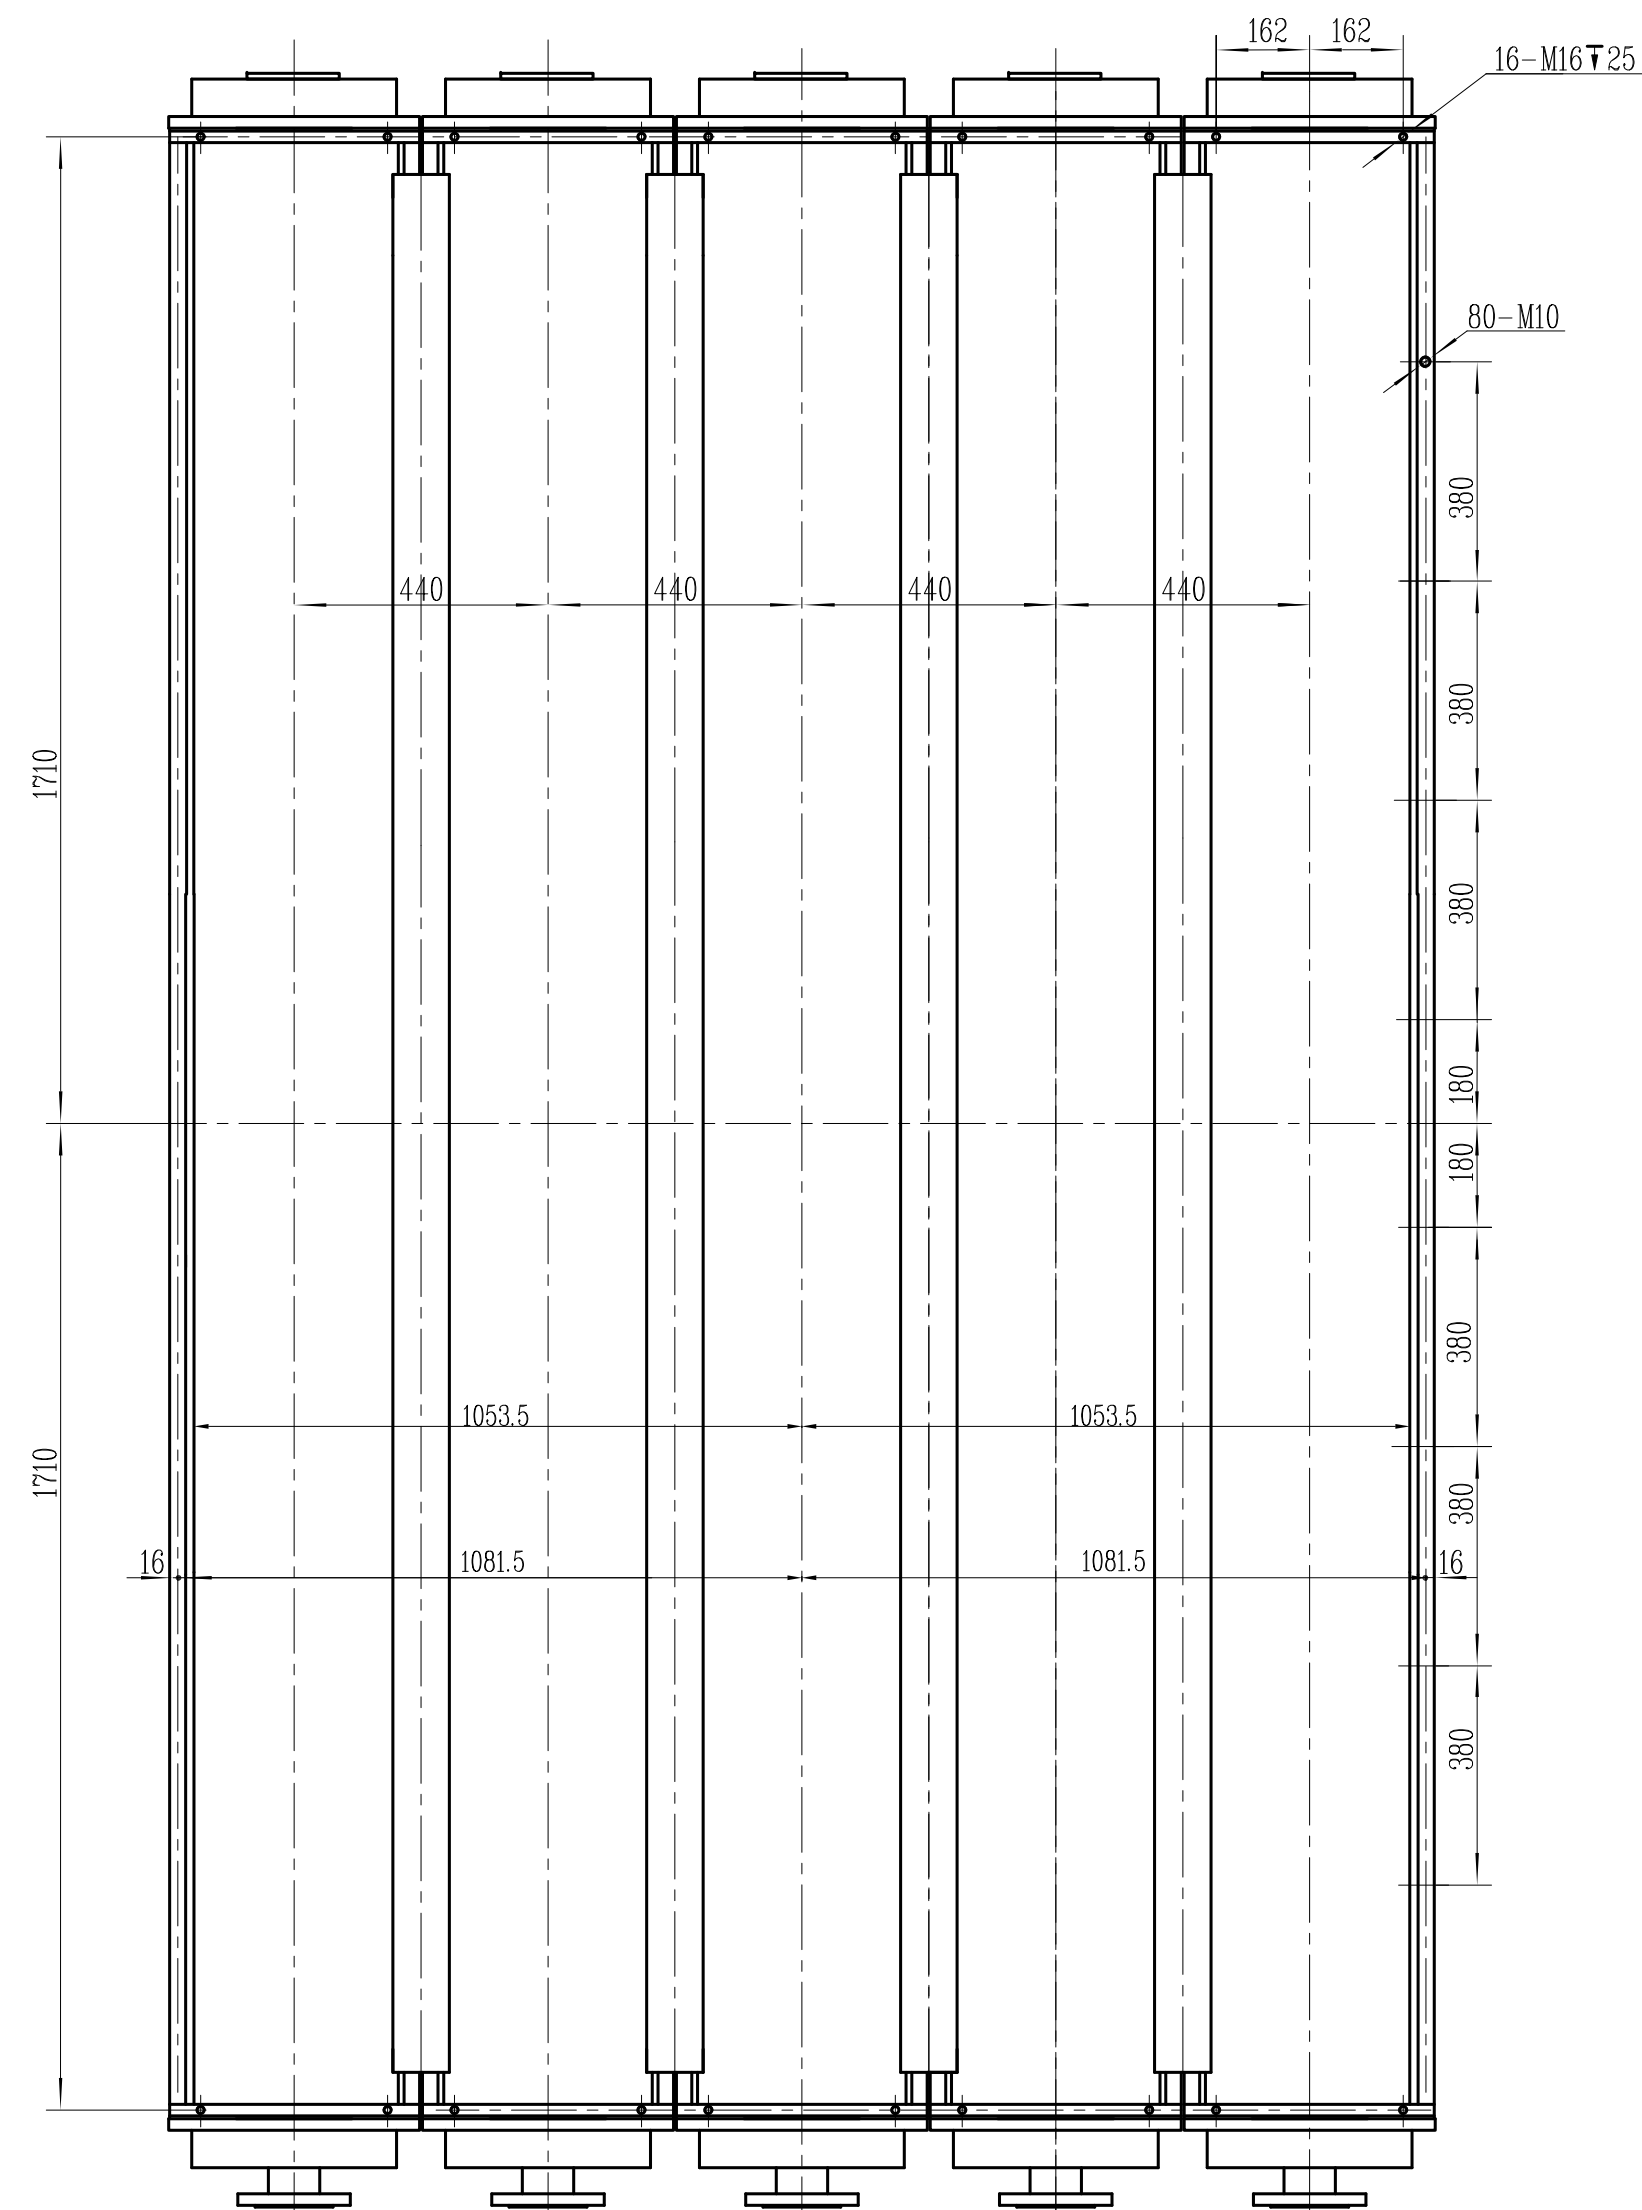


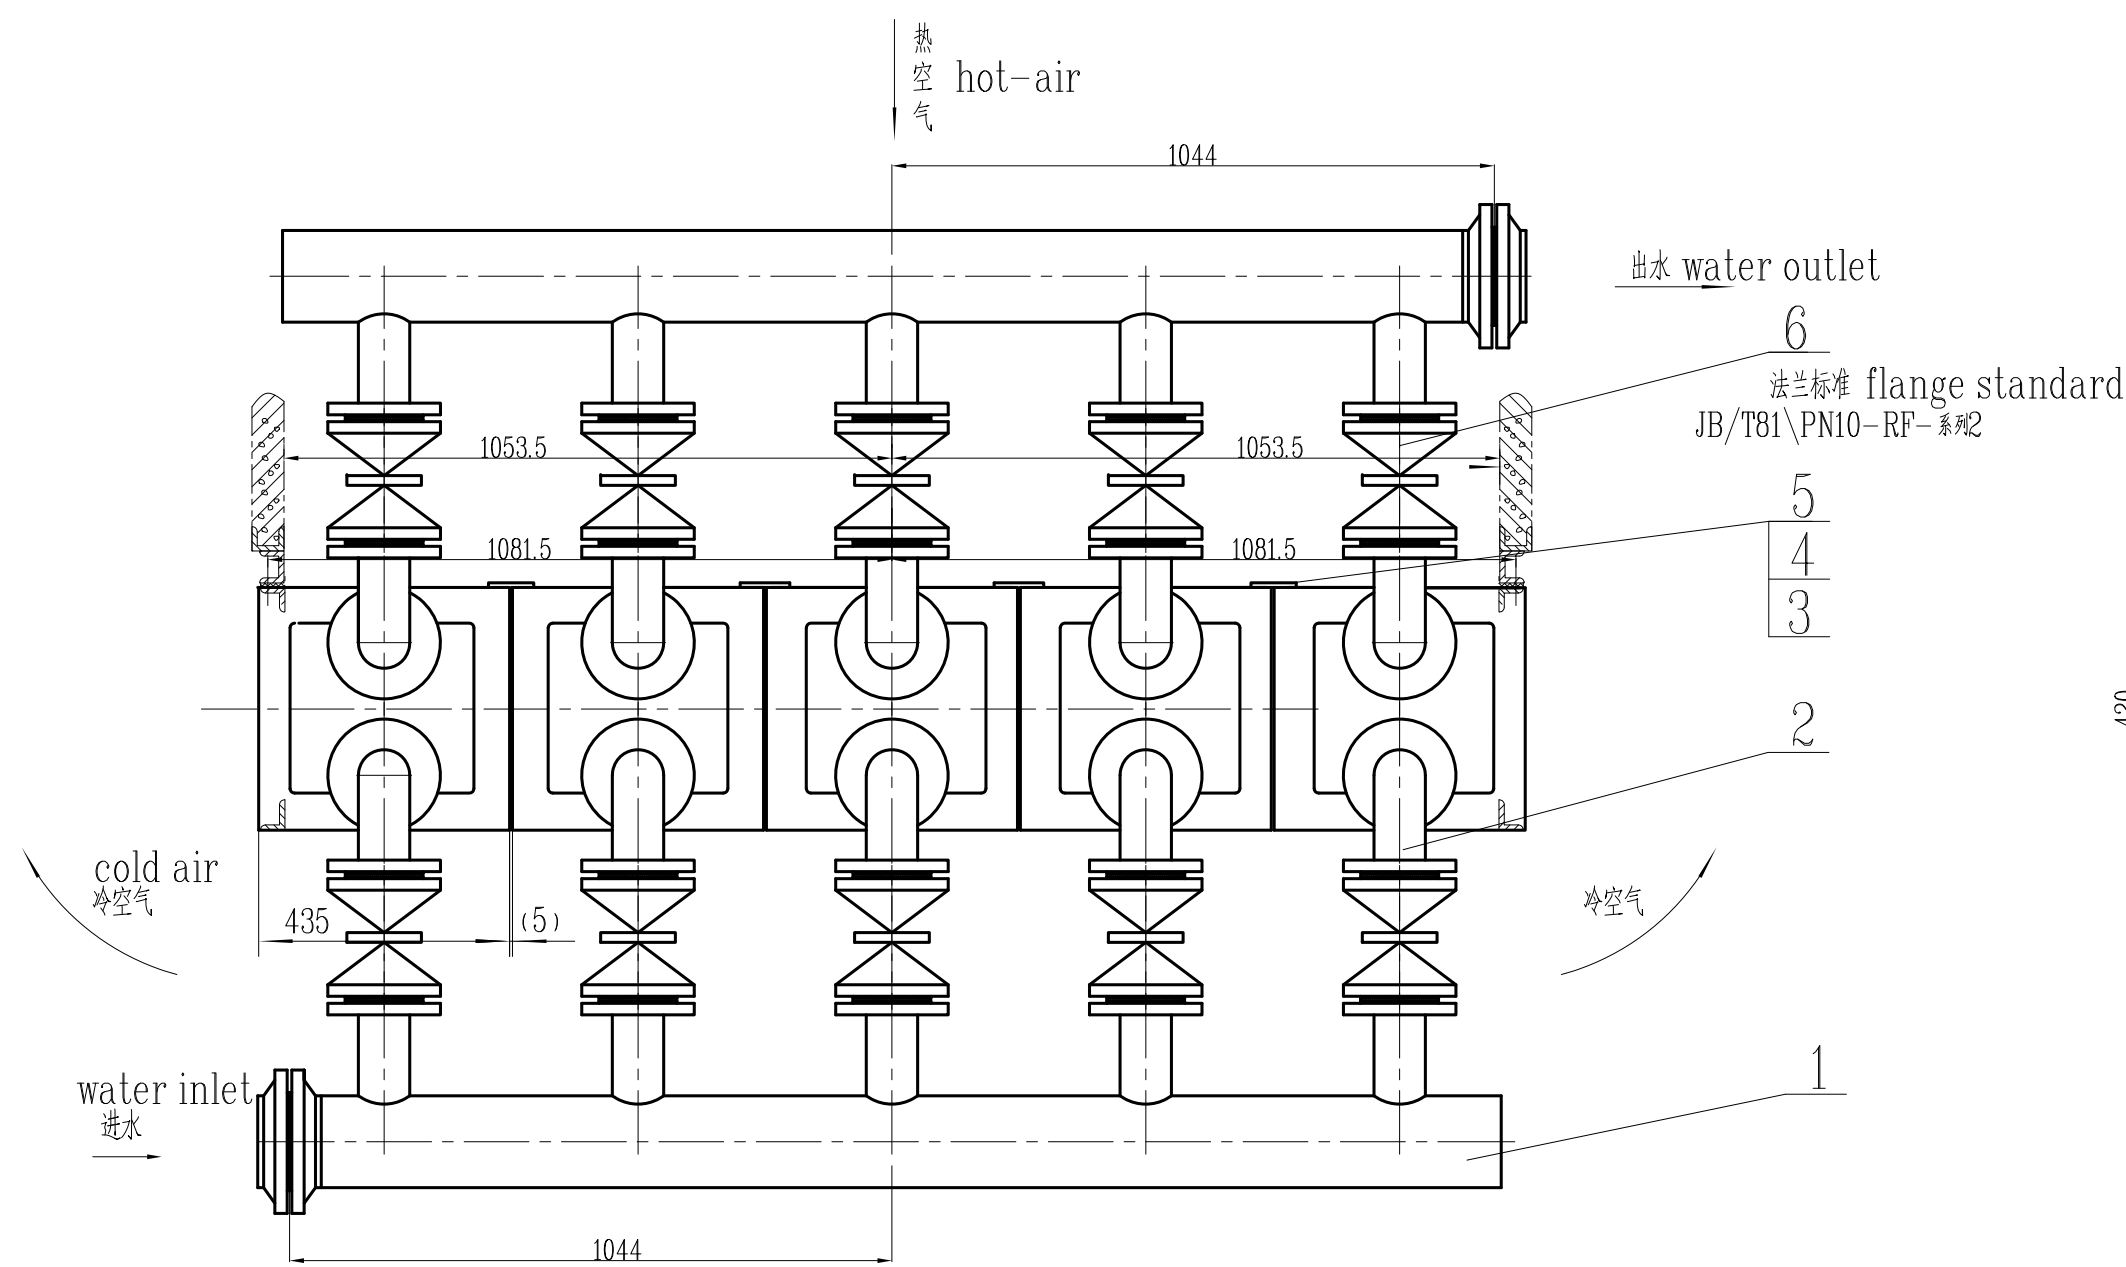

技术要求

1、主要数据

- (1) 冷却器共5组, 总容量500kW;
- (2) 耗水量160t/h;
- (3) 额定工作压力0.2MPa;
- (4) 水压降约10000Pa;
- (5) 风压降约370Pa;
- (6) 空气流量 $20\text{m}^3/\text{s}$;
- (7) 试验水压0.6MPa;
- (8) 冷却水进水温度 $<33^\circ\text{C}$;
- (9) 出风温度 $<40^\circ\text{C}$;

2、与空冷器基础有关的钢梁及横梁及密封处毛毡、螺栓等电站自备,基础有关的钢梁、横梁与空冷器之间用毛毡等密封后,可以采用密封胶等将缝隙处进行封涂以达到密封效果。

3、空冷器标高由设计单位确定,但应大于1000mm,且迎风面距离机座底部应大于1000mm。

4、保证该空冷器装配的完整性。本空气冷却器装配包括空冷器总进出水管法兰及反法兰(含螺栓、螺母、垫片)。项1联接水管分别与总进、出水管法兰和中间阀法兰焊接好后发货。项2~16装配后随空冷器发货。

5、每组冷却器配套提供进出水法兰及反法兰(含连接螺栓、螺母、垫片)。项2支管与空冷器连接处反法兰在安装时,由安装单位根据现场实际情况调整位置并焊牢,并与空冷器一同作水压试验。

6、空气冷却器在制作厂内预装，预装后做好标记拆开发货。

7、空气冷却器在电站安装时,安装单位可以根据实际情况,增、减项17、18垫片,保证空气冷却器满足安装、使用要求。

8、JB/T87法兰垫片可用GB/T9126同规格垫片代用。

Technical Requirements

1. Main Data

- (1) Air cooler: five(5) groups, and total capacity of 500kW.
- (2) Cooling water volume: 160t/h
- (3) Maximum working water pressure: 0.2MPa.
- (4) Hydraulic resistance pressure drop: 10000Pa.
- (5) Gas fluid resistance pressure drop: 370Pa.
- (6) Air flow rate 20 m³/s.
- (7) Test water pressure: 0.6MPa.
- (8) Inlet temperature of cooling water: <33°C
- (9) Temperature of wind outlet: <40°C

2. Steel beams, cross beams, sealing felts and bolts related to the foundation shall be supplied by the power station. Seal gaps between the foundation structure and the air cooler with felts and sealant.
3. Air cooler elevation shall be ≥ 1000 mm, and the distance from the windward face to the unit base shall also be ≥ 1000 mm.
4. Full assembly shall be provided, including main inlet/outlet flanges, counter flanges, bolts, nuts and gaskets. Item 1 connecting pipes shall be pre-welded to the flanges before delivery. Items 12~16 shall be delivered assembled with the air cooler.
5. Each cooler shall include matching inlet/outlet flanges, counter flanges and fasteners. Item 2 branch pipe counter flanges shall be adjusted and welded on site, then hydrostatically tested with the air cooler.
6. The air cooler shall be pre-assembled and marked at the factory, then disassembled for shipment.
7. The installation unit may add or remove Item 17 and 18 gaskets on site to meet installation and operation requirements.
8. JB/T 87 flanged gaskets may be replaced with GB/T 9126 gaskets of the same specification.

18	JB/T87	法兰垫片 flange gasket	10	RF-DN80-PN10/2\				调整用											
17	JB/T87	法兰垫片 flange gasket	10	RF-DN80-PN10/1\				调整用											
16	HG/T20592	法兰 flange	2	WN150(B)-10-RF-S-4.5mm-Q235\				外 购											
15	GB/T97.1	垫圈 washer	16	20-D.Zn\															
14	GB/T6170	螺母 nut	16	M20-D.Zn\															
13	GB/T5783	螺栓 bolt	16	M20×80-8.8-D.Zn\															
12	JB/T87	法兰垫片 flange gasket	2	RF-DN150-PN10/3\															
11	GB/T97.1	垫圈 washer	120	16-D.Zn\															
10	GB/T6170	螺母 nut	120	M16-8-D.Zn\															
9	GB/T5783	螺栓 bolt	120	M16×65-8.8-D.Zn\															
8	JB/T87	法兰垫片 flange gasket	30	RF-DN80-PN10/3\															
7	T1502-10-2	冷却器 cooler	5		500	2500		借 用											
6		闸阀 sluice valve	10	Z45H-10C/DN80\				内购, 法兰标准 GB/T1900-1992-1级											
5	GB/T97.1	垫圈 washer	64	10-D.Zn\															
4	GB/T5783	螺栓	64	M10×20-8.8-D.Zn\															
3	T1502-10-101	盖板 cover plate	4		3.4	13.6		借 用											
2	T159-10-2	支管 branch pipe	10		13	130		借 用											
1	T332-10-1	联接管 Collecting water pipe	2		68	136													
序号 No.	代 号 Code	名 称 Name	数量 Qty	材 料 Material	单 重 Single Weight	总 重 Total Weight	备 注 Remark												
标记	页数	分 区	更改率	签字	日期														
设 计	廖昌广	审 定	林宏斌																
校 核	尤小波	标准化检查	吴 鸿																
审 查	程 建																		
会 签	易桂林	日 期	2026.1																
500kW 空气冷却器装配 225kW Air Cooler General Assembly																			
				T332-10 四川嘉州东风电机有限公司 SIHUAN JIAZHOU DONGFENG ELECTRIC MACHINERY CO., LTD															
				<table><tr><td>图样标记</td><td>版本号</td><td>重 量</td><td>比 例</td></tr><tr><td></td><td></td><td>3260</td><td>1:10</td></tr><tr><td colspan="2">共 1 张</td><td colspan="2">第 1 张</td></tr></table>				图样标记	版本号	重 量	比 例			3260	1:10	共 1 张		第 1 张	
图样标记	版本号	重 量	比 例																
		3260	1:10																
共 1 张		第 1 张																	